

VORTEX INHIBITOR

GENERAL

“AE” Vortex Inhibitors are provided to attachment to pump suction pipes installed in cleaned water storage tanks. They are design to eliminate any vortex within the pump suction pipes, hence ensuring the pump is fully primed at all times. This prevents the pump from being damaged, ensuring maximum delivery is achieved.

FEATURES



- Compact design.
- Lightweight and robust construction.
- Corrosion resistance.
- Reliable performance with no maintenance required.

MATERIAL

Polypropelene, stainless wire mesh, bolts, nuts and washers.

WARRANTY

The product is guaranteed against defect in the materials and workmanship within one year from date of delivery.

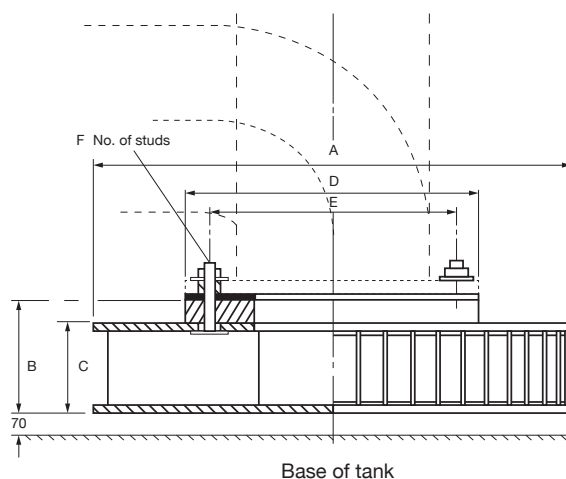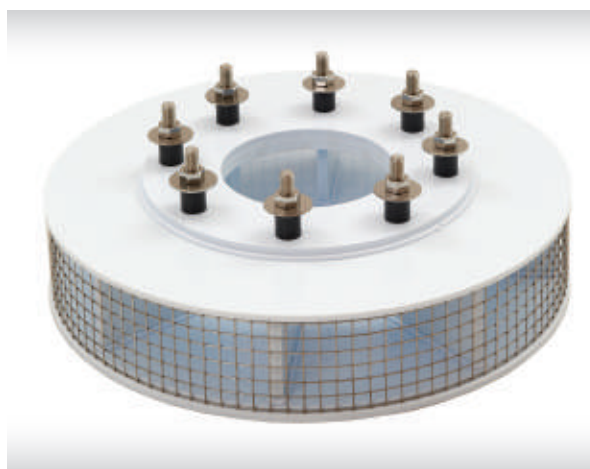

Suction Lifts B.S. 4504 Table PN 16. Dimensions mm:

Nominal Bore	A	B	C	D	E	F
65	190	63	50	185	145	4
80	230	73	60	200	160	8
100	305	85	72	220	180	8
150	455	108	95	285	240	8
200	610	133	120	340	295	12
250	760	158	145	405	355	12
300	915	183	170	460	410	12
350	1070	213	200	520	470	16
400	1220	233	220	580	525	16
450	1350	258	245	640	585	20