



## Mounting Detail - Firesure:

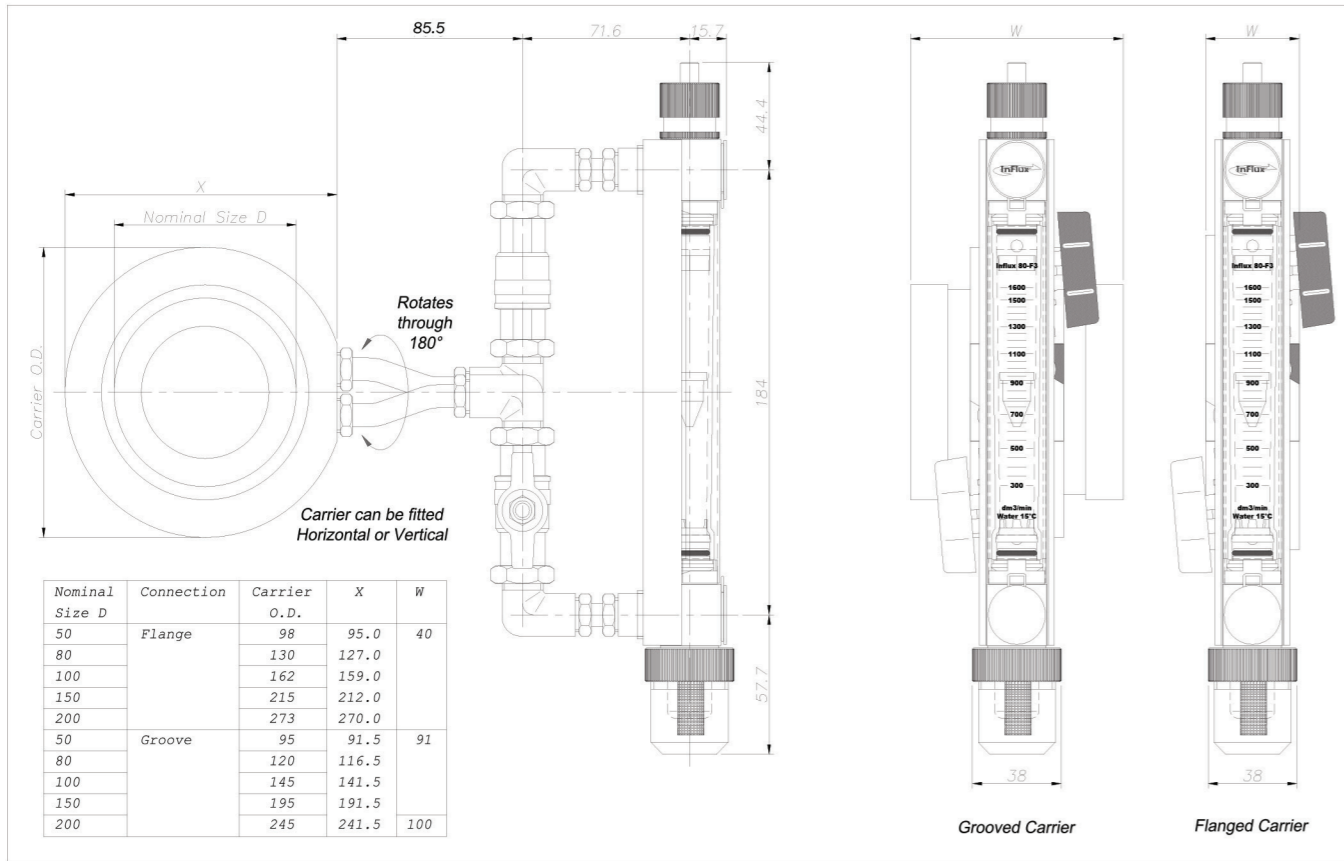

## Mounting Detail - Firesure X:

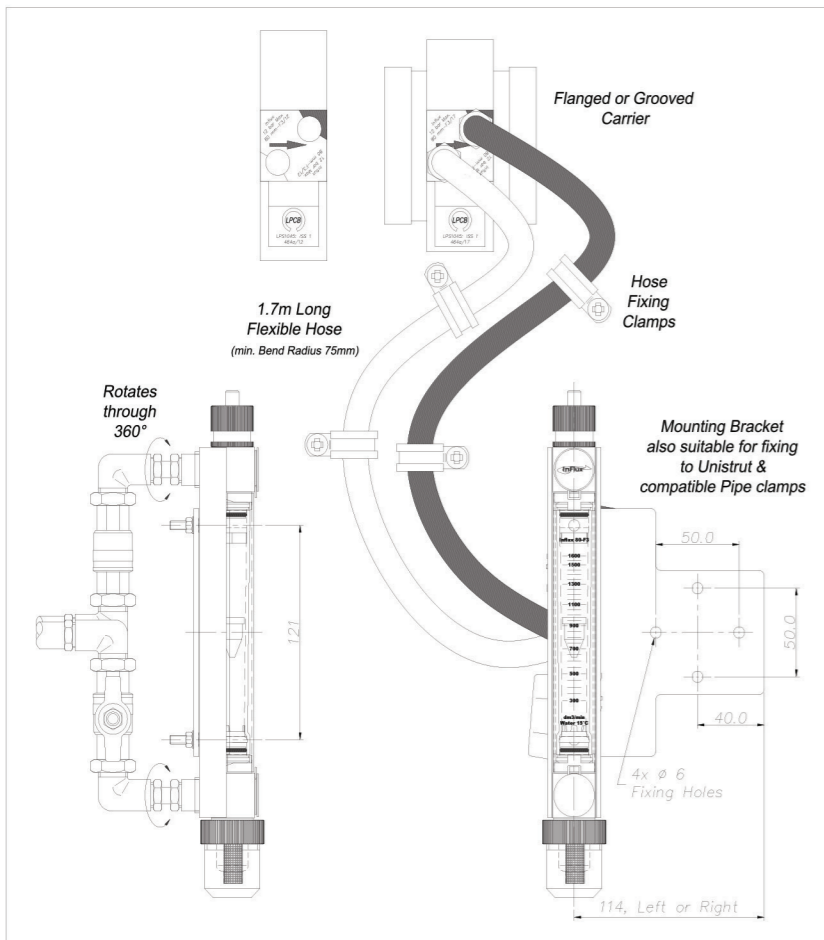

Assessed to ISO 9001:2008  
LPCB Cert No. 464



**ASSOCIATED ENTERPRISES (S) PTE LTD**  
Blk 28, Sin Ming Drive  
#01-171/177  
Singapore 575702  
Tel: (65) 6455 0555 Fax: (65) 6455 0505  
Email: enquiry@aespl.com.sg  
Website: www.aespl.com.sg

# iNFLUX Firesure and Firesure X


## FLOWMETERS FOR SPRINKLER SYSTEMS.



- Flange and groove style connection.
- Simple and quickest to install.
- Horizontal or vertical pipe-lines.
- Most extensive flow ranges.



LPS 1045: Issue 1  
Cert No. 464a

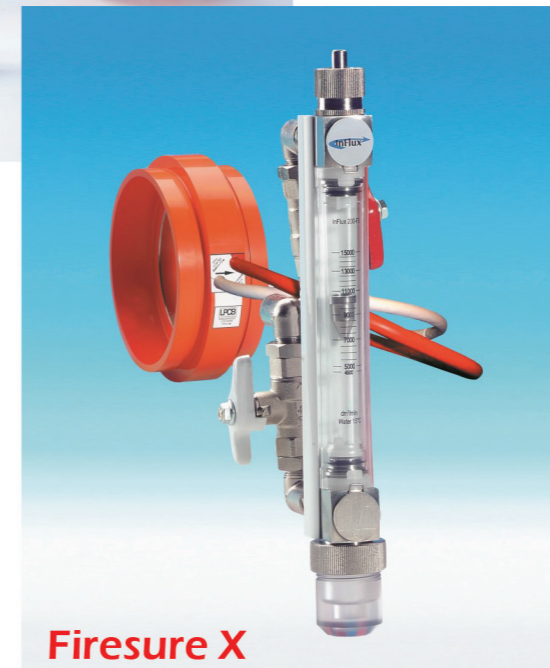

- Direct and remote indicator positioning options.
- Design flexibility to meet CDM regulations.
- Increased pressure rating.
- Remote indicator can be retrofitted.
- Certificated to LPS 1045

Size & connection	Firesure close coupled		Firesure X remote coupled.	
	dm <sup>3</sup> /min	LPCB ref.	dm <sup>3</sup> /min	LPCB ref.
<b>50 Flange</b>	150 to 700	464a/01	200 to 850	464a/11
<b>80 Flange</b>	300 to 1600	464a/02	200 to 1800	464a/12
<b>100 Flange</b>	500 to 3500	464a/03	400 to 4000	464a/13
<b>150 Flange</b>	900 to 7900	464a/04	1100 to 9500	464a/14
<b>200 Flange</b>	2000 to 15000	464a/05	2500 to 17000	464a/15
<b>50 Groove</b>	150 to 700	464a/06	200 to 850	464a/16
<b>80 Groove</b>	300 to 1600	464a/07	200 to 1800	464a/17
<b>100 Groove</b>	500 to 3500	464a/08	400 to 4000	464a/18
<b>150 Groove</b>	900 to 7900	464a/09	1100 to 9500	464a/19
<b>200 Groove</b>	2000 to 15000	464a/10	2500 to 17000	464a/20

## Construction and Specification:

	Firesure*	Firesure X
<b>Main orifice carrier</b>	Flange and groove connection, 316SS orifice in polyester coated steel body.	
<b>Indicator assembly</b>	Nickel plated brass valves and components, borosilicate glass flow tube and Viton seals. Polycarbonate filter bowl and stainless steel filter element.	
<b>Indicator connectors</b>	Direct coupled nickel plated copper tube.	1.7 metre colour coded hydraulic hoses and stainless steel hose clips.
<b>Indicator mounting</b>	Simple direct to main body	Galvanised steel bracket with 6mm fixing holes, compatible with Unistrut frame and pipe clip mounting options.
<b>Safe Working Pressure</b>	16 bar g (with x 2.5 safety factor.)	
<b>Accuracy</b>	5% of flow rate reading.	
* FIRESURE X RETROFIT PACKAGE: Existing Firesure installations can be converted to Firesure X by use of FSX01 or FSX02 retrofit package; .		

Size & Connection	LPCB Ref. No. & Order codes		Dimension 'W' (mm)	Weight (kg)
	Firesure	Firesure X		
<b>50 Flange</b>	464a/01	464a/11	40	3.8
<b>80 Flange</b>	464a/02	464a/12	40	4.8
<b>100 Flange</b>	464a/03	464a/13	40	6.0
<b>150 Flange</b>	464a/04	464a/14	40	7.8
<b>200 Flange</b>	464a/05	464a/15	40	10.5
<b>50 Groove</b>	464a/06	464a/16	90	3.9
<b>80 Groove</b>	464a/07	464a/17	90	4.7
<b>100 Groove</b>	464a/08	464a/18	90	5.5
<b>150 Groove</b>	464a/09	464a/19	90	6.8
<b>200 Groove</b>	464a/10	464a/20	100	9.2

## Typical Pipeline Configuration (Horizontal or Vertical):

