STANDARD FIRE HOSEREEL CABINET

GENERAL

"AE" range of surface wall mounted standard type fire hosereel cabinets are generally fabricated from electro-galvanised steel material. Aluminium or stainless steel materials are available upon request.

The door hinges are either riveted or welded to the cabinet and swings out 180 degree from left to right. The cabinet comes with viewing panel design at the door to show the equipment installed inside.

The quality of workmanship and finishes are carefully planned and executed from the initial stage of preparing the material, fabrication, upto the surface preparation and powder coating.

The standard finishes of the electro-galvanised steel and aluminium cabinets are "Red" epoxy/polyester powder coated and oven baked. Stainless steel Type 304 and 316 grade cabinets come with 4B quality finishes. Other finishes available on request.

Fig.300

FEATURES

- · Compact and elegant design.
- Quality finishes in epoxy/polyester powder coated and oven baked.
- Easy and fast installation with minimum labour required.



Model	Features for 25mm x 30M Swing Type Fire Hosereel Cabinet				
	Plastic doorcam	3mm glass	Springlock	Spare Key Box	Aluminium handle
Fig. 300	V	V			~
Fig. 310		V	V	V	✓
Fig. 320		/ *	V		✓


^{*} The glass is 5mm tempered type.




Fig.320

STANDARD FIRE HOSEREEL CABINET

"FRONT ELEVATION" "SECTION VIEW" "REAR VIEW" 16mm → | ← 340mm − -Steel hinge **FIRE** 12mm dia x 4 nos mounting holes HOSEREEL φ 800mm 25mm i← 200mm → -3mm plain glass "PLAN VIEW" 100mm -Plastic doorcam (w/o key-lock type) Fig 300

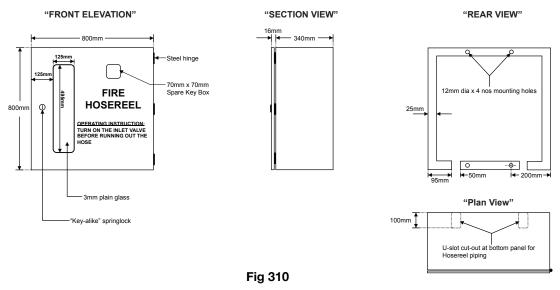

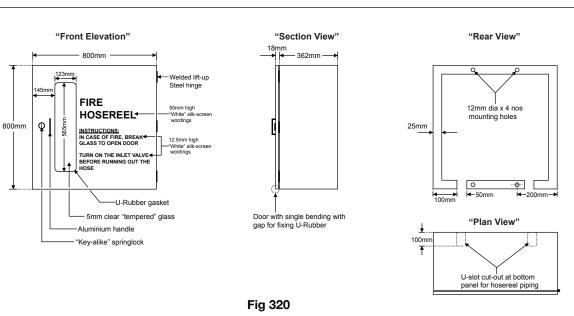

 ^{*} All dimensions shown are in millimetres.
* Due to the improvement in the design and standard, we reserve the right to change the specifications without prior notice.