


# GUARD II FIRE HOSE

## General:

“Guard” Type II layflat fire hose is made of polyester staple and filaments weaved single jacket with internal extruded EPDM rubber lining. The type 2 polyurethane outer coating makes for extra abrasion resistance and reduces water absorption. It is washable, lightweight, durable and economical fire fighting hose conforming to BS6391 Type I standard with minimum friction loss due to a very smooth internal rubber lining.

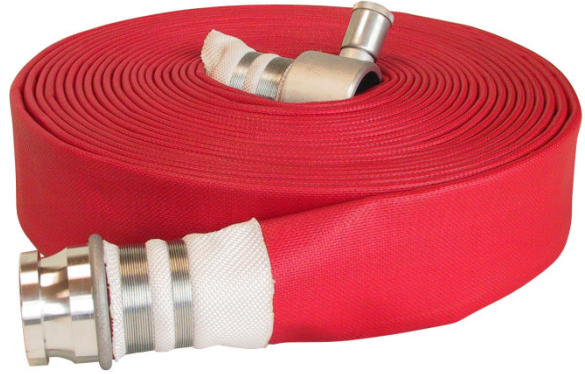

**Guard II**

## Application

- Municipal Fire Brigades
- Marine Vessels
- Industrial Fire Brigades
- Refineries
- Irrigation

## Technical Data:

<b>Diameter</b>	mm	38	45	50	63	70	76	102	127	152
	Inches	1 1/2	1 3/4	2	2 1/2	2 3/4	3	4	5	6
<b>Burst Pressure (min)</b>	kgf/cm <sup>2</sup>	50	50	50	50	50	42	38	38	38
<b>Proof Pressure</b>	kgf/cm <sup>2</sup>	25	25	25	25	25	21	19	19	19
<b>Kink Test Pressure</b>	kgf/cm <sup>2</sup>	25	25	25	25	25	21	19	19	19
<b>Working Pressure</b>	kgf/cm <sup>2</sup>	17	17	17	17	17	15	15	15	15
<b>30m Length coil diameter</b>	cm	45	55	55	55	55	60	60	60	60
<b>Mass per Meter (Max.)</b>	gm	275	320	350	425	480	650	800	1000	1200
<b>Abrasion Resistance (Min.) (at 7kg /cm<sup>2</sup> Pressure)</b>	Cycles	100	100	100	100	100	100	100	100	100
<b>Heat Resistance</b>	Sec (Min.)	8	8	8	8	8	8	8	8	8



**ASSOCIATED ENTERPRISES (S) PTE. LTD.**

BLOCK 28, #01-171-177 SIN MING DRIVE SINGAPORE 575702

TEL : (65) 6455 0555 FAX : (65) 6455 0505

EMAIL: enquiry@aespl.com.sg WEBSITE: www.aespl.com.sg

Co. Reg. No. 197900283H GST No. M2-0033562-7



Lic. No.: WMKAZ1084  
WMK00028

0620

Lic. No.: KMSE1487  
KMSE1488